

## DS-K2604T Access Controller (Main Board)



DS-K2604T access controller (main board) is designed with latest structure with TCP/IP and RS485 communication interface. The communication data is encrypted to improve the security of system. The controller also supports offline.

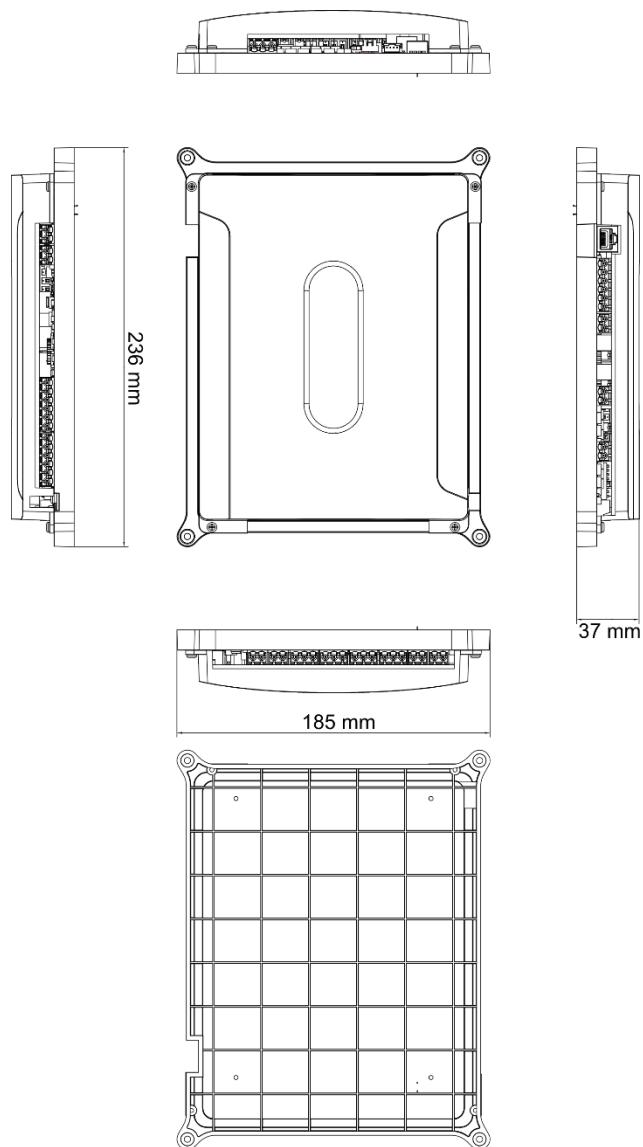
- Supports multi-door interlocking function, anti-passback function, multi-card function, first person function, super card and super password function
- Online upgrade function and online remote control of the doors
- Supports alarm event upload
- Supports RS-485 interface and Wiegand interface for accessing card reader. Wiegand interface supports W26/W34 and is seamlessly compatible with third-party card reader with Wiegand interface
- Supports time synchronization via NTP, manual or automatic method
- Data can be permanently saved when the access controller is powered off

## ▪ Specification

Interface	
Network interface	TCP/IP
Lock control	4
Exit button	4
Door contact input	4
Alarm input	4
Alarm output	4
RS-485	8
Wiegand	4
Capacity	
Card capacity	100,000
Event capacity	300,000
General	
Power supply	12 VDC
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Power consumption	With load: ≤ 100 w Without load: ≤ 4 w
Working humidity	10% to 90% (no condensing)
Dimensions	236 mm × 185 mm × 37 mm (9.3" × 7.3" × 1.5")

## ▪ Available Model

DS-K2604T

**▪ Dimension****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHD



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq