

DS-KIS204 Video Door Phone

Key Features

Door Station


- Self-adaptive IR supplement
- One-touch calling
- Pinhole camera with 720 x 576 @ 25 fps
- Unlock controlling

Indoor Station

- Hands-free video intercom communication
- Supports monitoring the door station and the external analog camera
- Supports image capture (Max. 200) and overwrite when exceed 200
- Supports captured image playback
- Remote unlocking



Typical Application

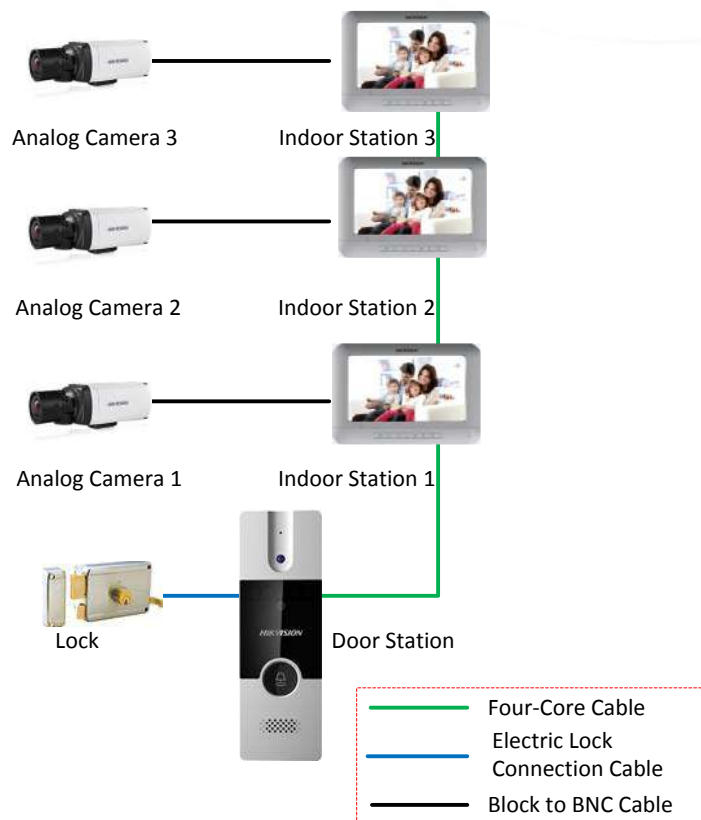


Specifications


Video Door Phone Model	DS-KIS204
Door Station (DS-KB2411-IM)	
Video Parameters	
Camera	1/4" CMOS
Resolution	720 × 576
Video frame rate	PAL: 25 fps
Audio parameters	
Audio input	Built-in Omnidirectional Microphone
Audio output	Built-in Loudspeaker
Audio quality	Noise Suppression and Echo Cancellation
Light Supplement	
Light supplement mode	Photosensitive IR Supplement, IR Range: 2 Meters
Device interfaces	
Four-wire interface	1 Four-Wire Interface (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding)
IO output	1 Relay Output
General	
Material	Aluminum Alloy
Power consumption	Max. 3W
Working temperature	-30° C to +60° C (-22° F to 140° F)
Working humidity	10% to 90%
Dimension (L x W x H)	128 mm × 42 mm × 24.8 mm (5.0" × 1.7" × 0.9")
Indoor Station (DS-KH2220-S)	
Display parameters	
Display screen	7-Inch Colorful TFT LCD
Display resolution	800 × 480
Operation method	Physical Button
Audio parameters	
Audio input	Built-in Omnidirectional Microphone
Audio output	Built-in Loudspeaker
Audio quality	Noise Suppression and Echo Cancellation
Device interfaces	
Four-wire interface	4 Four-Wire Interfaces
	1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding
General	
Power supply	12 VDC
Power consumption	≤5 W
Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Dimension (L x W x H)	195.8 mm × 132.8 mm × 18.39 mm (7.7" × 5.2" × 0.7")

Appearance and Interfaces

Door Station

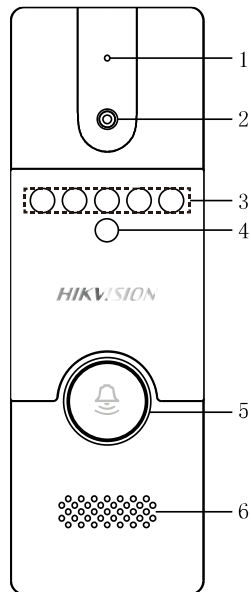

Indoor Station

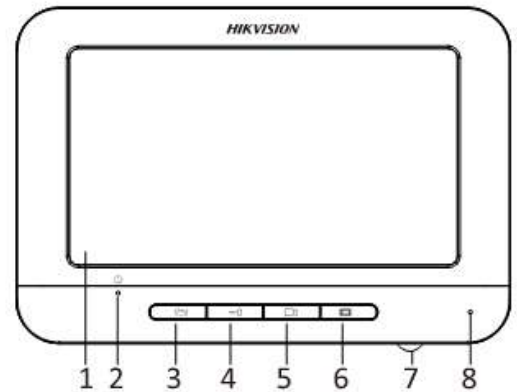

Index	Description
1	Microphone
2	Built-in Camera
3	Supplement Light
4	Photoresistor
5	Call Button
6	Loudspeaker

Index	Description
1	LCD Display Screen
2	Power Supply Indicator
3	Call Accept/Decline Key
4	Unlock Key
5	Live View Key
6	Image Key
7	Volume Wheel
8	Microphone

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahirvision.com

Hikvision Canada
T +1-866-200-6680
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
latam.support@hikvision.com

Hikvision Turkey
T +90 (216) 521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikla.pentilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com